

CRANK-OUT CANTILEVER WORKSHEET

Company Name _____ Date _____

PRODUCT DESCRIPTION

CRANK-OUT CANTILEVER DESCRIPTION

Length _____ Number of Uprights _____
 Width _____ Arm Levels _____
 Height _____ Arm Depth _____
 Weight _____ Stop Height _____


BUILDING REQUIREMENTS

CRANK-OUT CANTILEVER MODEL NUMBER

Floor Space Available _____ Model # _____ Quantity _____
 Stationary Stock Divider Quantity _____ Adjustable Stock Divider Quantity _____
 Ceiling Height _____ Intermediate Support Quantity _____
 Height Below Hook _____

CRANK-OUT CANTILEVER MODEL NUMBER EXAMPLE:

CC-4-3-24-15-20

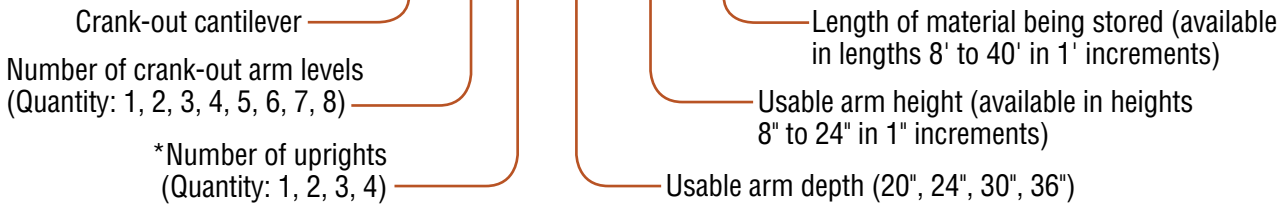

* Each upright has a 20,000# capacity stationary top

HEIGHT AND DEPTH OF STANDARD CRANK-OUT CANTILEVER RACKS								
Levels	20" Deep Arms		24" Deep Arms		30" Deep Arms		36" Deep Arms	
	12"	15"	12"	15"	12"	15"	12"	15"
3-Level	80 1/2"	95 1/2"	80 1/2"	95 1/2"	80 1/2"	95 1/2"	80 1/2"	95 1/2"
4-Level	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"
5-Level	130 1/2"	145 1/2"	130 1/2"	145 1/2"	130 1/2"	145 1/2"	130 1/2"	145 1/2"
6-Level	155 1/2"	170 1/2"	155 1/2"	170 1/2"	155 1/2"	170 1/2"	155 1/2"	170 1/2"
7-Level	180 1/2"	195 1/2"	180 1/2"	195 1/2"	180 1/2"	195 1/2"	180 1/2"	195 1/2"
8-Level	205 1/2"	220 1/2"	205 1/2"	220 1/2"	205 1/2"	220 1/2"	205 1/2"	220 1/2"
Depth	62"		70"		82"		94"	
Capacity	6,600 lbs. per arm		5,600 lbs. per arm		4,800 lbs. per arm		4,200 lbs. per arm	

Special Instructions:

Notes:

Options Available:

- Stock Dividers (all welded or adjustable)
- Intermediate Support
- UHMW Lined Arms
- Custom Colors